

Data Sheet

KFD2-EB2



Supplied by

247able.com

Call us on +44 (0)118 916 9420 | Email info@247able.com

Power Feed Module

KFD2-EB2

Features

- Interface for Power Rail
- Supply rating 4 A, external fused
- Relay contact output, reversible
- LED status indication

Function

The power feed module interfaces 24 V DC power to the Power Rail at a maximum current of 4 A. The twin input terminals allow for daisy-chaining of supply (max. 10 A).

A green LED on the front of the unit indicates that power is on, and a red LED illuminates during error conditions.

In the event of a field wiring or barrier fault from any barrier on the Power Rail, the integral collective error messaging relay alerts the controller via a single discrete I/O point.


This relay can be configured as normally open or normally closed.

In the sense of functional safety (SIL) the device provides no dangerous failures. Thereby the safe condition of the supplied barrier must be defined as the powerless state. Thus the device will not influence the safety calculation or the SIL value.

This device is compatible with all versions of the Power Rail.


Assembly

Front view

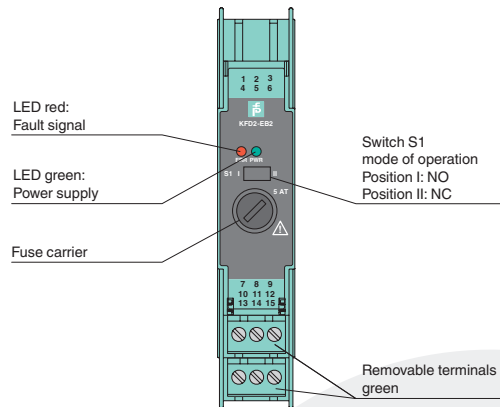

CE

Connection

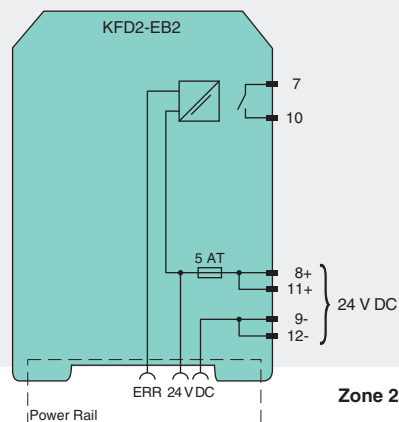

Technical data

KFD2-EB2

Supply	
Connection	terminals 11+, 12- terminals 8+, 9-
Rated voltage	20 ... 30 V DC The maximum rated operational voltage of the devices plugged onto the Power Rail must not be exceeded.
Power loss	≤ 1 W
Output	
Power Rail feed	Output current: ≤ 4 A
Fault signal	relay output: NO contact
Contact loading	30 V AC/ 2 A / $\cos \phi \geq 0.7$; 40 V DC/ 2 A
Energized/De-energized delay	approx. 20 ms / approx. 20 ms
Fusing	5 AT
Directive conformity	
Electromagnetic compatibility	
Directive 2004/108/EC	EN 61326-1:2006
Conformity	
Electromagnetic compatibility	NE 21:2006
Protection degree	IEC 60529:2001
Ambient conditions	
Ambient temperature	-25 ... 60 °C (-13 ... 140 °F)
Mechanical specifications	
Protection degree	IP20
Mass	approx. 100 g
Dimensions	20 x 119 x 115 mm (0.8 x 4.7 x 4.5 in) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with Ex-areas	
Statement of conformity	TÜV 00 ATEX 1618 X
Group, category, type of protection, temperature class	⊕ II 3G Ex nA nC IIC T4
Directive conformity	
Directive 94/9/EC	EN 60079-0:2009 , EN 60079-15:2010
International approvals	
FM approval	
Control drawing	116-0160
Approved for	Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, IIC
CSA approval	
Control drawing	116-0160
Approved for	Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, IIC
General information	
Supplementary information	Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Accessories

Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!

Reading Office

Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire. RG6 4UT. UK.
Tel: +44 (0)118 9311188
Email: info@able.co.uk

Aberdeen Office

Unit 6 Airside Business Park, Kirkhill Industrial Estate,
Dyce, Aberdeen. AB21 0GT. UK.
Tel: +44 (0)1224 725999
Email: ab@able.co.uk

Internet: www.able.co.uk
e-procurement: www.247able.com
Registered in England No: 01851002
VAT No: GB 417 2481 61

