

Data Sheet

KFD2-STC4-EX1



Supplied by

247able.com

Call us on +44 (0)118 916 9420 | Email info@247able.com

SMART Transmitter Power Supply

KFD2-STC4-Ex1

Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Output 0/4 mA ... 20 mA
- Terminals with test points
- Up to SIL2 acc. to IEC 61508

Function

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire SMART transmitters in a hazardous area, and can also be used with 2-wire SMART current sources.

It transfers the analog input signal to the safe area as an isolated current value.

Digital signals may be superimposed on the input signal in the hazardous or safe area and are transferred bi-directionally.

If the HART communication resistance in the loop is too low, the internal resistance of 250 Ω between terminals 8 and 9 can be used.

Test sockets for the connection of HART communicators are integrated into the terminals of the device.


Application

The device supports the following SMART protocols:

- HART
- BRAIN
- Foxboro

Assembly

Front view

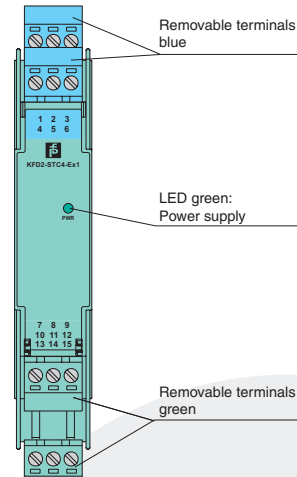


CE



SIL2

Connection

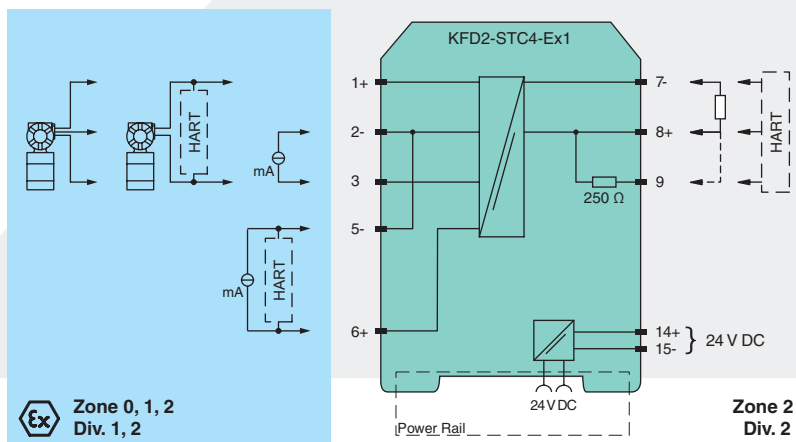

Technical data

KFD2-STC4-Ex1

General specifications	
Signal type	Analog input
Supply	
Connection	Power Rail or terminals 14+, 15-
Rated voltage	20 ... 35 V DC
Ripple	within the supply tolerance
Power loss	1.4 W
Power consumption	1.8 W
Input	
Connection	terminals 1+, 2-, 3 or 5-, 6+
Input signal	0/4 ... 20 mA
Voltage drop	≤ 2.4 V at 20 mA (terminals 5, 6)
Input resistance	≤ 64 Ω terminals 2-, 3 ; ≤ 500 Ω terminals 1+, 3 (250 Ω load)
Available voltage	≥ 16 V at 20 mA terminals 1+, 3
Output	
Connection	terminals 7-, 8+, 9
Load	0 ... 800 Ω
Output signal	0/4 ... 20 mA (overload > 25 mA)
Ripple	≤ 50 μA _{rms}
Transfer characteristics	
Deviation	at 20 °C (68 °F), 0/4 ... 20 mA ≤ 10 μA incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature	0.25 μA/K
Frequency range	field side into the control side: bandwidth with 0.5 V _{pp} signal 0 ... 7.5 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V _{pp} signal 0.3 ... 7.5 kHz (-3 dB)
Settling time	200 μs
Rise time/fall time	20 μs
Electrical isolation	
Output/power supply	functional insulation, rated insulation voltage 50 V AC
Directive conformity	
Electromagnetic compatibility	
Directive 2004/108/EC	EN 61326-1:2006
Conformity	
Electromagnetic compatibility	NE 21:2011
Protection degree	IEC 60529:2001
Protection against electrical shock	UL 61010-1:2004
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications	
Protection degree	IP20
Mass	approx. 200 g
Dimensions	20 x 124 x 115 mm (0.8 x 4.9 x 4.5 in) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with Ex-areas	
EC-Type Examination Certificate	BAS 99 ATEX 7060 , for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection	Ⓔ II (1)GD, [Ex ia] IIC, [Ex iaD], (-20 °C ≤ T _{amb} ≤ 60 °C) [circuit(s) in zone 0/1/2]
Input	Ex ia IIC, Ex iaD
Supply	
Maximum safe voltage U _m	250 V (Attention! The rated voltage can be lower.)
Equipment	terminals 1+, 3-
Voltage U _o	25.4 V
Current I _o	86.8 mA
Power P _o	551 mW
Permissible connection values [EEx ia]	
Equipment	terminals 2-, 3
Current I _o /Current I _i	74 mA / 115 mA
Current I _i	115 mA
Voltage U _o	3.5 V
Current I _o	74 mA
Power P _o	64 mW
Permissible connection values [EEx ia]	
Equipment	terminals 1+, 2 / 3-
Voltage U _i	30 V
Current I _i	115 mA

Technical data

KFD2-STC4-Ex1

Voltage	U_o	25.4 V
Current	I_o	115 mA
Power	P_o	584 mW
Permissible connection values [EEx ia]		
Equipment		terminals 5-, 6+
Voltage	U_i	30 V
Current	I_i	115 mA
Voltage	U_o	8.7 V
Current	I_o	0 mA
Output		
Maximum safe voltage	U_m	250 V (Attention! The rated voltage can be lower.)
EC-Type Examination Certificate		
Group, category, type of protection		DMT 01 ATEX E 133
Statement of conformity		Ⓔ I (M1) [Ex ia] I
Group, category, type of protection, temperature class		TUV 99 ATEX 1499 X , observe statement of conformity
Electrical isolation		Ⓔ II 3G Ex nA II T4 [device in zone 2]
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 94/9/EC		EN 60079-0:2012 , EN 60079-11:2007 , EN 60079-15:2010 , EN 61241-11:2006 , EN 50303:2000
International approvals		
UL approval		
Control drawing		116-0173 (cULus)
IECEx approval		IECEx BAS 04.0016
Approved for		[Zone 0] [Ex ia] IIC, [Ex iaD], [Ex ia] I
General information		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Accessories

Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!

Reading Office

Cutbush Park, Danehill, Lower Earley,
Reading, Berkshire. RG6 4UT. UK.
Tel: +44 (0)118 9311188
Email: info@able.co.uk

Aberdeen Office

Unit 6 Airside Business Park, Kirkhill Industrial Estate,
Dyce, Aberdeen. AB21 0GT. UK.
Tel: +44 (0)1224 725999
Email: ab@able.co.uk

Internet: www.able.co.uk
e-procurement: www.247able.com
Registered in England No: 01851002
VAT No: GB 417 2481 61

