

Data Sheet

J. M. CANTY EXTREMETEMP™

Furnace Cameras



Supplied by


247able.com

Call us on +44 (0)118 916 9420 | Email info@247able.com

CANTY

PROCESS TECHNOLOGY

EXTREMETEMP™ FURNACE CAMERAS

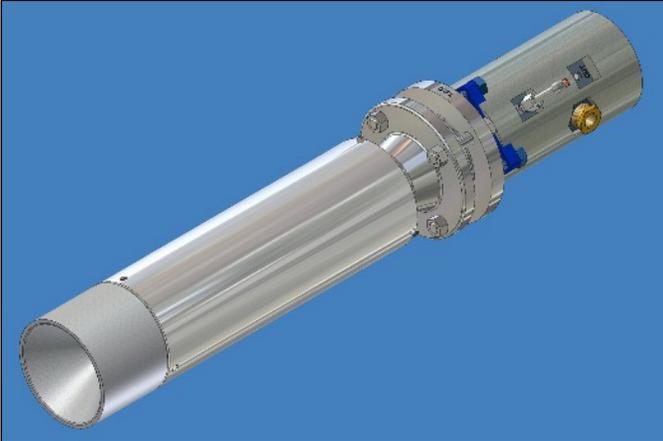

UNMATCHED PERFORMANCE

Canty EXTREMETEMP™ Cameras are ideal for demanding applications involving visual inspection or verification in extreme temperature environments. Computer designed optics allow for a crystal-clear picture. A digital electronic auto-iris provides an exceptional image of your application without the problems associated with manual apertures, non-blooming CCD or Ethernet cameras. High temperature lenses are designed to survive in process temperatures even in the event of air loss for short time periods.

SAFETY IS A PRIMARY CONCERN

Canty EXTREMETEMP™ Camera Systems feature a fused glass seal standard with every model. This unique seal provides an impenetrable safety barrier to protect the camera electronics from the harsh process environment.

ACCESSORIES

- This system provides the ability to remotely view a process that may not normally be watched. Multiple viewing stations may be linked to the system output so various departments may monitor a process.
- Ethernet systems allow the additional functionality of being able to remotely view through a Gigabit network system. Users can have access to live system images from their office networked computer.
- CANTYVISION™ software is available for customers that require additional functionality over simple viewing of a live image. Liquid level, position of an arc or ladle, and location of an ingot or bar are typical outputs customers utilize.
- The Canty Vector Control Module™ is available for use with Ethernet systems. For additional information see TA12100-1012.

FEATURES

- Replaceable ceramic nose cone
- Disposable quartz protective shield
- High temperature furnace lens process temp. to 3000° F
- Auto electronic iris
- High quality quartz optics
- Fused glass seal separates electronics from process
- Insertion lens available up to 36" long
- Gigabit Ethernet, camera in an insulated electronics housing
- 100-1000 SCFH and 60-600 SCFH Flowmeters
- High intensity light filters and hot mirrors available

APPLICATIONS

- Furnaces
- Glass Production
- Plasma ARC Furnaces
- Incinerators
- Kilns
- Melting Chambers
- Vitrification

SPECIFICATIONS

- Video Output : • Ethernet
- Cable: • Ethernet - CAT5e or better cabling
- Power Requirements: • User supplies 120 VAC/60 Hz or 230 VAC/50 Hz power to Canty PSU which transforms to 12 VDC and wires to camera
- POE direct to camera
- Ratings: • Available in NEMA 4x or IP66 enclosures
- Mountings: • 6.1" clearance hole into insulation block when mounted horizontally with adequate system support
- Weld on sleeve collar for attachment to curved walls and allows for insertion length adjustment
 - 6", 150# ANSI flange for sealed mount requirements
 - 6.1" clearance hole into insulation block when mounted to a Canty retraction system
- Requirements: • Air cooled electronics housing - 90 PSI, 8 SCFM clean & dry instrument air
- Water cooled electronics housing - 2 gallons of water per minute
 - Insertion lens - may require 13 SCFM clean, dry gas depending on application

CANTY

Buffalo, NY USA

Dublin, Ireland

Phuket, Thailand


www.jmcanty.com

Ph: (716) 625 4227


Ph: + 353 (01) 882 9621

Ph: + 66 (83) 968 9548


DIMENSIONAL INFORMATION

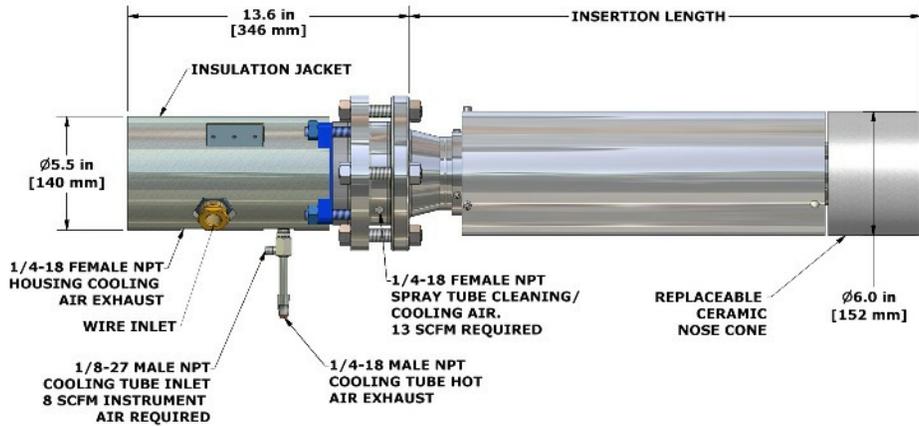


Dimensional Information For Diagram and Part Number Selection	
Combined Refractory/ Wall thickness	Insertion Length
6" - 16"	24"
17" - 30"	36"

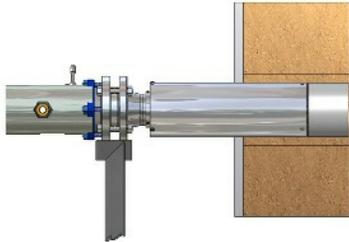

6H - MOUNT CONFIGURATION

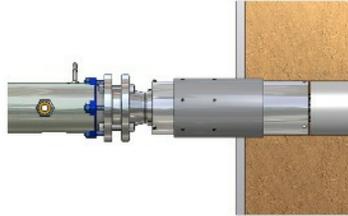

6C - COLLAR MOUNT CONFIGURATION

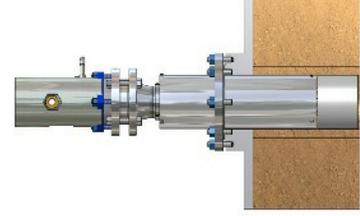

6F - 6", 150# CLASS FLANGE MOUNT CONFIGURATION

Notes:

1. 6H Mounting Configuration requires a 6.1" hole through the outer wall and refractory. Customer provides support brackets to hold camera in required position. Customer must seal the joint between the camera and shell while in position.
2. 6C Mounting Configuration requires a 6.1" hole through the refractory and 6.7" counterbore for the included mounting collar to slip into. Once in position the customer welds the collar to the outer shell. Customer must seal the joint between the camera and collar while in position. Includes mounting collar and setscrews.
3. 6F Mounting Configuration requires a 6.1" hole through the outer wall and refractory. Customer welds included carbon steel stud pad to the outer shell. Customer then welds the stainless steel mount flange to the camera to create the appropriate insertion length. Includes stud pad, mounting flange, hardware and gasket.
4. For installation manual see TA8823-1.PDF.

Ordering Information

HOW TO ORDER: Select the appropriate symbols and build a part number as shown:

EXAMPLE:

VSH DE 6 8 C E - S - 6C - 24INS

VIDEO OUTPUT FORMAT
VSH - North American Standard
VEH - European Standard

TEMPERATURE RATING: FURNACE OPERATING: 3,000°F TEMPERATURE AT LENS: 2,200°F
8 - Air Cooled Electronics
9 - Water Cooled Electronics*

*Air still required for lens purge

LENS VIEW ANGLE
B - 30°(H) x 22°(V)
C - 45°(H) x 34°(V)
D - 65°(H) x 49°(V)

INSERTION LENGTHS
24INS - 24" [610mm]
36INS - 36" [914mm]

MOUNTING CONNECTION
6H - 6.1" Clearance Hole, Horizontal
6C - 6" Weld On Collar
6F - 6", 150# ANSI Flange

CAMERA POWER SUPPLY OPTIONS
5 - Power Supply in WP NEMA 4X Enclosure (120 VAC Input)
6 - Power Supply in IP66 Enclosure (230 VAC Input)
9 - 24V DC, No Power Supply Required
E - POE Power Direct to Camera

CANTY

Buffalo, NY USA
Ph: (716) 625 4227

Dublin, Ireland
Ph: + 353 (01) 882 9621

Phuket, Thailand
Ph: + 66 (83) 968 9548

www.jmcanty.com